

Heart Sound Analysis for Blood Pressure Estimation

Rui Guedes

Faculdade de Medicina da Universidade do Porto, Portugal

Henrique Cyrne Carvalho

Serviço de Cardiologia, Hospital de Santo António, Centro Hospitalar do Porto, Portugal

Ana Castro

Universidade do Porto, Portugal

INTRODUCTION

Heart disease is one of the main causes of death globally. Some heart diseases may be diagnosed by measuring the pulmonary arterial pressure (PAP), which may be increased due to heart and pulmonary diseases. An increase in the pressure of the pulmonary artery could be an indication of pulmonary arterial hypertension, and may be defined as a mean PAP superior to 25 mmHg (Galie et al., 2009) and outside the 15-30 mmHg range for the systolic PAP (Edwards Lifesciences LLC, 2009).

For diagnostic purposes, most patients undergo an electrocardiogram (ECG), a chest X-ray, an echocardiogram, a computerized tomography scan of the chest, and a cardiac catheterization. The last one, the invasive arterial blood pressure (BP) monitoring, is considered the gold standard for BP assessment, providing accurate information, however it is also the most expensive (Chung, Chen, Alexander, & Cannesson, 2013). During a cardiac catheterization, a small flexible tube is inserted into a blood vessel in the arm or the groin, with a contrast dye that makes it possible to see under X-ray and obtain images of the heart structure and vessels. The catheter with a pressure sensor allows measurement of pressures in the vessels and heart chambers, which provide clues to a pulmonary hypertension diagnosis. Despite the catheterization procedure being performed


with the patient awake, and bring little or no pain, the patient may still feel pain in the blood vessel where the catheter is inserted. There is a mandatory rest time after the procedure. Also financial costs and risk discourage patients to undergo right heart catheterization procedure and from seeking potentially life-saving diagnosis and treatment of elevated PAP. Elevated PAP can be an indicator of pulmonary hypertension, a condition that may worsen over time, although treatments can relieve symptoms and give patients a better quality of life. The diagnostic we want to focus in pulmonary hypertension is the pulmonary arterial hypertension (PAH) that is a type of high BP that occurs in the right side of the heart and in the pulmonary arteries. PAH occurs when the pulmonary arteries thicken or grow rigid, this makes blood flow more difficult. The right side of the heart has to work harder to push blood through the arteries, and the arteries are not able to carry adequate blood to oxygenate in the lungs. It is difficult to continuously assess pulmonary arterial hypertension evolution, which motivates the search for accurate noninvasive PAP measurement devices.

BACKGROUND

A noninvasive estimation of the PAP is already in clinical use, the Doppler echocardiography; it uses ultrasound technology to measure PAP by

DOI: 10.4018/978-1-5225-2255-3.ch087

Figure 1. Phonocardiogram (PCG) representation with first (S1) and second (S2) heart sounds annotated

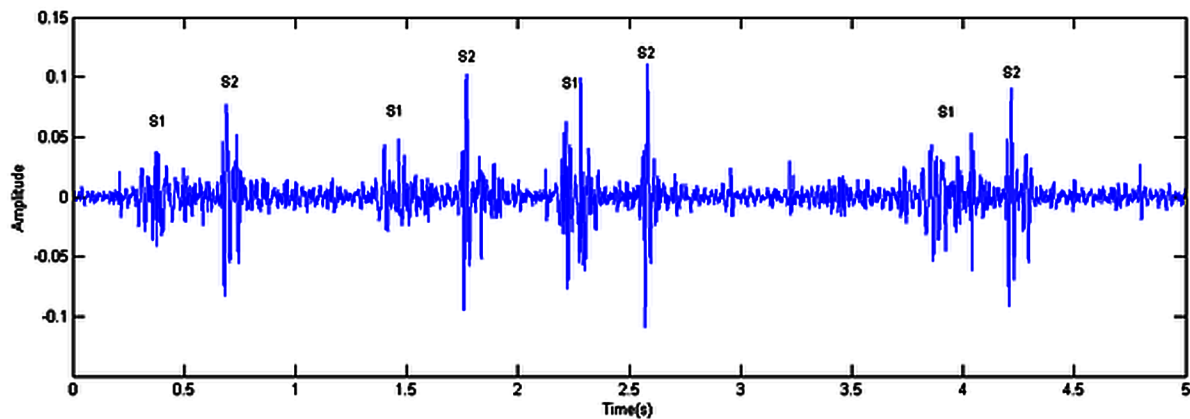

analyzing the speed of blood flowing through the heart. Doppler is widely used by cardiologists, it requires specific equipment, a specialized and trained doctor, and therefore it is difficult to be used for continuous monitoring, or in places without specialized healthcare professionals. Also some patients are not candidates for Doppler due to physiological constraints or poor signal-to-noise ratio: PAP cannot be estimated in 34 to 76% of patients with chronic obstructive pulmonary disease, 10 to 20% of patients with elevated PAP, and the most important in approximately half of patients with normal PAP (Xu, Durand, & Pibarot, 2003); also the Doppler estimations present an average error of 30% compared to right heart catheterization (Smith & Ventura, 2013).

Another method proposed for PAP noninvasive estimation is the heart sound analysis. Phonocardiography is a technique that generates a record of sounds produced by the contracting heart, resulting from valves and associated vessels vibration, the phonocardiogram (PCG), as we can see in Figure 1.

The sound is collected with a stethoscope over the main auscultations points on the chest; for the detection of pulmonary hypertension, usually the second heart sound exhibits an hyperphoresis of the pulmonary component, more audible over the pulmonary auscultation site (Young, 2001). Recent rebirth of the stethoscope, with electronic record of the PCG, has led to the search of automatic signal processing techniques to detect this clinical sign,

and few studies have addressed this issue in the literature (J Xu et al., 2002; Lim, Shin, Park, & Bae, 2013; Nigam & Priemer, 2004). Phonocardiography has been used to estimate PAP from noninvasively recorded heart sounds using models for how these sounds correlate with PAP. There are however several research questions that need to be answered in the PCG study, namely the robust segmentation of heart sounds, and modeling of the heart components that allow the extraction of relevant clinical information. It is a necessity to better understand the PCG and its relation with the PAP. To allow a better comprehension of the problem, the following sections provides a brief introduction to the anatomy, physiology, and the heart sound genesis.

HEART SOUND ANALISYS FOR HYPERTENSION DETECTION

Several studies have addressed the way information contained in the heart sound may be related to the arterial BPs at the heart output. This method has been studied with more emphasis on the detection of patients with PAH, considering the frequency, the amplitude, and split of the constituent components of the S2 - aortic (A2) and pulmonary (P2) - corresponding to the closure of the homonym heart valves (Nigam & Priemer, 2004; Jingping Xu, Durand, & Pibarot, 2001).

9 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:

www.igi-global.com/chapter/heart-sound-analysis-for-blood-pressure-estimation/183814

Related Content

A Disaster Management Specific Mobility Model for Flying Ad-hoc Network

Amartya Mukherjee, Nilanjan Dey, Noreen Kausar, Amira S. Ashour, Redha Taiarand Aboul Ella Hassanien (2016). *International Journal of Rough Sets and Data Analysis* (pp. 72-103).

www.irma-international.org/article/a-disaster-management-specific-mobility-model-for-flying-ad-hoc-network/156480

Database Replication and Clustering for High Availability

Wenbing Zhao (2015). *Encyclopedia of Information Science and Technology, Third Edition* (pp. 1748-1755).

www.irma-international.org/chapter/database-replication-and-clustering-for-high-availability/112580

Identification Protocols

Sattar J. Aboud (2015). *Encyclopedia of Information Science and Technology, Third Edition* (pp. 1435-1446).

www.irma-international.org/chapter/identification-protocols/112545

Structuration Theory in Information Systems Research: Methods and Controversies

Marshall Scott Poole and Gerardine DeSanctis (2004). *The Handbook of Information Systems Research* (pp. 206-249).

www.irma-international.org/chapter/structuration-theory-information-systems-research/30351

An Objective Compliance Analysis of Project Management Process in Main Agile Methodologies with the ISO/IEC 29110 Entry Profile

Sergio Galvan-Cruz, Manuel Mora, Rory V. O'Connor, Francisco Acosta and Francisco Álvarez (2017). *International Journal of Information Technologies and Systems Approach* (pp. 75-106).

www.irma-international.org/article/an-objective-compliance-analysis-of-project-management-process-in-main-agile-methodologies-with-the-isoiec-29110-entry-profile/169769