

## Chapter 6

# Autotrophic Denitrification Processes

**Marisol Belmonte**

*Pontificia Universidad Católica de Valparaíso-  
Universidad de Playa Ancha, Chile*

**Carmen Fajardo**

*Universidad Autónoma Metropolitana-  
Iztapalapa, Mexico*

**Javiera Belén Toledo-Alarcón**

*Institut National de la Recherche Agronomique,  
France*

**Daniel Valenzuela Heredia**

*University Adolfo Ibáñez, Chile*

**Lorena Jorquera**

*Pontificia Universidad Católica de Valparaíso,  
Chile*

**Ramón Méndez**

*University of Santiago de Compostela, Spain*

**Estela Tapia-Venegas**

*Pontificia Universidad Católica de Valparaíso,  
Chile*

**Gonzalo Ruiz-Filippi**

*Pontificia Universidad Católica de Valparaíso,  
Chile*

## ABSTRACT

*Effluents coming from anaerobic digesters are characterized by a COD/N ratio between 2 and 10, high ammonia  $\text{NH}_4^+$  concentrations about 500 mg/L and a temperature range of 25-35 °C. To remove nitrogen from these effluents biological processes as the autotrophic denitrification with sulfur compounds, hydrogen or methane can be applied. The main goal of this chapter is to describe and evaluate the use of these processes from an economic point of view. The methanotrophic denitrification is the cheapest alternative to remove nitrate from effluents with low COD/N ratios.*

## INTRODUCTION

Anaerobic digestion is the process most utilized for organic matter removal in industrial wastewater with high Chemical Organic Demand/Nitrogen (COD/N) ratio ( $> 10$  g/g), such as coming from marine products industries, livestock industry, agri-food industry, aquaculture, among others.

This process achieves relative high removal efficiency ( $> 80\%$ ) of carbonaceous compounds of wastewater but has a low efficiency ( $< 20\%$ ) regarding the nitrogen removal.


DOI: 10.4018/978-1-5225-1037-6.ch006

Effluents coming from anaerobic digesters are characterized by a COD/N ratio between 2 and 10 g/g, high ammonium ( $\text{NH}_4^+$ ) concentrations (about 500 mg/L) and a temperature range of 25-35 °C. To remove nitrogen from these effluents, the biological processes based on the biogeochemical nitrogen cycle are the most commonly using. However, the application of this process depends on the COD/N ratio that is present in the wastewater (Campos *et al.*, 2010).

When the COD/N ratio of the wastewater is higher than 5, the combination of conventional nitrification (sequential  $\text{NH}_4^+$  oxidation to nitrite ( $\text{NO}_2^-$ ) and nitrate ( $\text{NO}_3^-$ )) and heterotrophic denitrification (nitrate or nitrite reduction to nitrogen gas ( $\text{N}_2$ )) processes are the most used as treatment (Ahn, 2006). While the COD/N ratio of the wastewater is lower than 5, the addition of an external carbon source is necessary to remove nitrogen by heterotrophic denitrification, being more expensive the treatment. Autotrophic denitrification is considered an advanced process to remove nitrogen in effluents with low COD/N ratio (Ahn, 2006) (Figure 1). This process is characterized by using inorganic compounds such as sulfur compounds, hydrogen ( $\text{H}_2$ ) or methane ( $\text{CH}_4$ ) (Equations 1, 2 and 3) as electron donors to remove nitrogen and inorganic carbon as a carbon source. Therefore, autotrophic denitrification could be an attractive and suitable alternative for the treatment of wastewater with low COD/N ratios as effluents coming from anaerobic digesters, in comparison with the heterotrophic denitrification.



Figure 1. Partial cycle of nitrogen: nitrification and denitrification

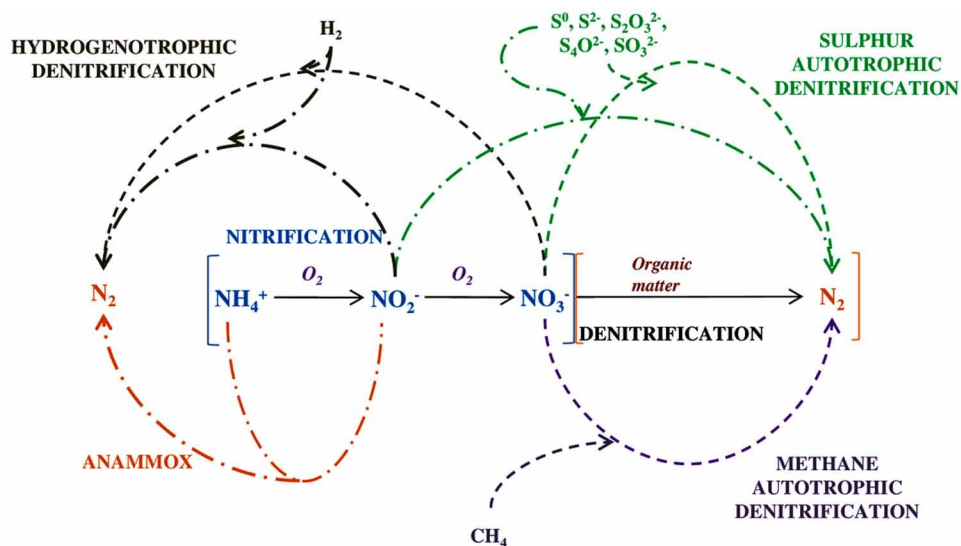

25 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:  
[www.igi-global.com/chapter/autotrophic-denitrification-processes/170023](http://www.igi-global.com/chapter/autotrophic-denitrification-processes/170023)

## Related Content

---

### Flood Modelling and Mapping: Case Study on Adyar River Basin, Chennai, India

Brema J. (2020). *Decision Support Methods for Assessing Flood Risk and Vulnerability* (pp. 104-139).  
[www.irma-international.org/chapter/flood-modelling-and-mapping/233460](http://www.irma-international.org/chapter/flood-modelling-and-mapping/233460)

### Probabilistic Studies of Hydrologic Drought Events in Juba River in Somalia

Anne Njeri Njoroge (2018). *Hydrology and Best Practices for Managing Water Resources in Arid and Semi-Arid Lands* (pp. 87-104).  
[www.irma-international.org/chapter/probabilistic-studies-of-hydrologic-drought-events-in-juba-river-in-somalia/186052](http://www.irma-international.org/chapter/probabilistic-studies-of-hydrologic-drought-events-in-juba-river-in-somalia/186052)

### Natural Reserves of Water on Earth

Rajendra Kumar and Shruti Mathur (2022). *Handbook of Research on Water Sciences and Society* (pp. 699-721).  
[www.irma-international.org/chapter/natural-reserves-of-water-on-earth/299908](http://www.irma-international.org/chapter/natural-reserves-of-water-on-earth/299908)

### The Use of Alternative Fuels and Emission Control Methods for Compression Ignition Engines

T. Shaafi, J. Sathik Basha, Abidoye Luqman Kolawole, V. Siva Shankar and G. Velmurugan (2023). *Opportunities and Challenges in Climate-Friendly Clean Water and Energy Technologies* (pp. 185-206).  
[www.irma-international.org/chapter/the-use-of-alternative-fuels-and-emission-control-methods-for-compression-ignition-engines/322456](http://www.irma-international.org/chapter/the-use-of-alternative-fuels-and-emission-control-methods-for-compression-ignition-engines/322456)

### Aerobic Granular Sludge: Treatment of Wastewaters Containing Toxic Compounds

Catarina L. Amorim, Irina S. Moreira, Anouk F. Duque, Mark C. M. van Loosdrecht and Paula M. L. Castro (2017). *Technologies for the Treatment and Recovery of Nutrients from Industrial Wastewater* (pp. 231-263).  
[www.irma-international.org/chapter/aerobic-granular-sludge/170026](http://www.irma-international.org/chapter/aerobic-granular-sludge/170026)