

# Chapter X

## Dealing with 3D Surface Models: Raster and TIN

**Mahbubur R. Meenar**  
*Temple University, USA*

**John A. Sorrentino**  
*Temple University, USA*

### ABSTRACT


*Three-dimensional surface modeling has become an important element in the processing and visualization of geographic information. Models are created from a finite sample of data points over the relevant area. The techniques used for these activities can be broadly divided into raster-based interpolation methods and vector-based triangulation methods. This chapter contains a discussion of the benefits and costs of each set of methods. The functions available using 3D surface models include elevation, queries, contours, slope and aspect, hillshade, and viewshed. Applications include modeling elevation, pollution concentration and run-off and erosion potential. The chapter ends with a brief discussion of future trends, and concludes that the choice among the methods depends on the nature of the input data and the goals of the analyst.*

### INTRODUCTION

A surface can be defined as a continuously variable and measurable field that contains an infinite number of points. It typically embodies a great deal of information, and may vary in elevation or

proximity to a feature (Bratt, 2004, O'Sullivan et al., 2003). The points that create a 3D topographic surface store elevation or z-values on the z-axis in a three-dimensional x, y, z coordinate system. Other examples of using continuous 3D surfaces are climate, meteorology, pollution, land cover,

Figure 1. Six alternative digital surface representations (Adapted from Longley et al., 2005b)

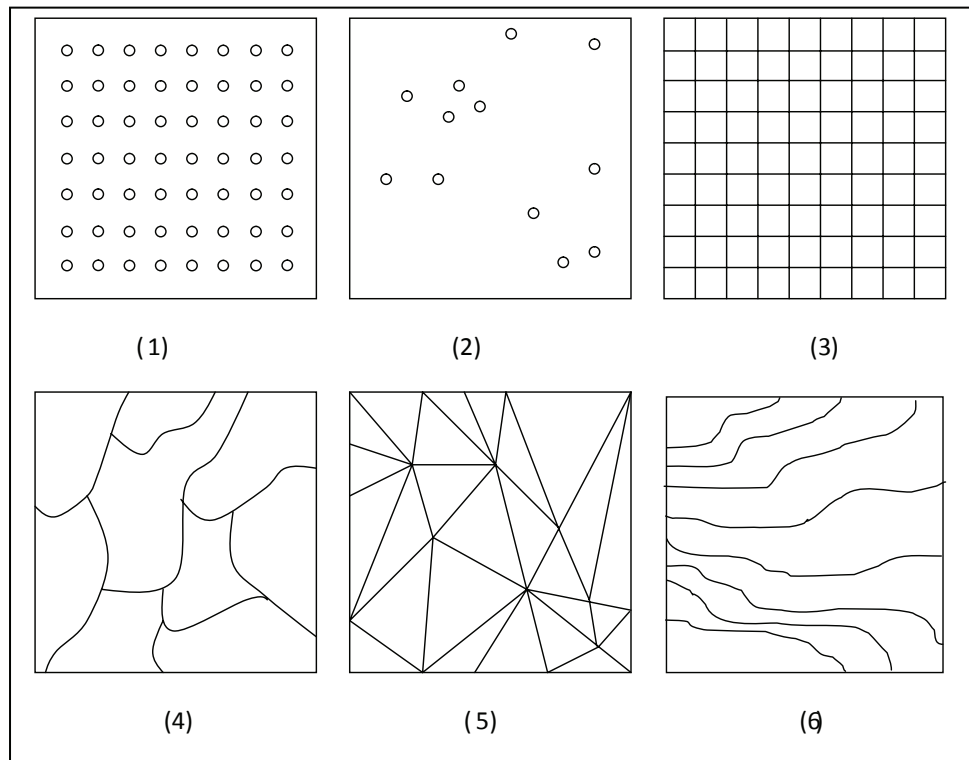

and natural resources (McCloy, 2006, Lo et al., 2002, Schneider, 2001).

In a Geographic Information Systems (GIS) environment, a surface cannot measure or record the z-values of all of the infinite points stored inside it. A surface model, commonly known as a Digital Terrain Model (DTM), or more generally, a Digital Elevation Model (DEM), is used to create 3D surfaces in various areas of science and technology. The surface model primarily follows a two step process in recording and storing data: sampling and interpolation (O'Sullivan et al., 2003, Heywood et al., 2002). The model selects sample observation points, either systematically or adaptively; takes values of this finite number of points; interpolates the values between these points; and finally stores the output information (McCloy, 2006; Bratt, 2004, Heywood et al., 2002).

There are six alternative ways, as shown in Figure 1, to express the continuous variation of a surface in digital representation: (1) regularly spaced sample points (e.g., a 10 meter spacing DEM); (2) irregularly spaced sample points (e.g., temperature recorded at different weather stations); (3) rectangular cells (e.g., values of reflected radiation in a remotely sensed scene); (4) irregularly shaped polygons (e.g., vegetation cover class of different parcels); (5) irregular network of triangles (e.g., elevation in a Triangulated Irregular Network or TIN); and (6) polylines representing contours (e.g., elevation in contour lines) (Longley et al., 2005b).

Among all these surfaces, numbers 1 and 3 are rasters and the remaining four are vectors, which use points (number 2), lines (number 6), or polygons (numbers 4 and 5). The DEMs or DTMs may be derived from a number of data sources, including contour and spot height information,

7 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:

[www.igi-global.com/chapter/dealing-surface-models/20389](http://www.igi-global.com/chapter/dealing-surface-models/20389)

## Related Content

---

### The Application of BIM as Collaborative Design Technology for Collective Self-Organised Housing

Ton Damen, Rizal Sebastian, Matthew MacDonald, Danny Soetanto, Timo Hartmann, Roberto Di Giulio, Peter Bonsmaand Klaus Luig (2015). *International Journal of 3-D Information Modeling* (pp. 1-18).

[www.irma-international.org/article/the-application-of-bim-as-collaborative-design-technology-for-collective-self-organised-housing/125260](http://www.irma-international.org/article/the-application-of-bim-as-collaborative-design-technology-for-collective-self-organised-housing/125260)

### Coastal Management Using UAS and High-Resolution Satellite Images for Touristic Areas

Apostolos Papakonstantinou, Michaela Doukari, Panagiotis Stamatisand Konstantinos Topouzelis (2019). *International Journal of Applied Geospatial Research* (pp. 54-72).

[www.irma-international.org/article/coastal-management-using-uas-and-high-resolution-satellite-images-for-touristic-areas/218206](http://www.irma-international.org/article/coastal-management-using-uas-and-high-resolution-satellite-images-for-touristic-areas/218206)

### Contribution of Urban Destinations to Physical Activity: Insight From Nationwide Smartphone Trajectory Data in China

Shutao Wei, Li Li, Jiahao Pan, Wei Tuand Xiaolu Zhou (2022). *International Journal of Applied Geospatial Research* (pp. 1-17).

[www.irma-international.org/article/contribution-of-urban-destinations-to-physical-activity/295864](http://www.irma-international.org/article/contribution-of-urban-destinations-to-physical-activity/295864)

### Stereo-Vision-Based Fire Detection and Suppression Robot for Buildings

Chao-Ching Ho (2013). *Geographic Information Systems: Concepts, Methodologies, Tools, and Applications* (pp. 783-797).

[www.irma-international.org/chapter/stereo-vision-based-fire-detection/70476](http://www.irma-international.org/chapter/stereo-vision-based-fire-detection/70476)

### Indicators of Land Degradation Vulnerability Due to Anthropogenic Factors: Tools for an Efficient Planning

V. Imbrenda, M. D'Emilio, M. Lanfredi, M. Ragostaand T. Simoniello (2013). *Geographic Information Analysis for Sustainable Development and Economic Planning: New Technologies* (pp. 87-101).

[www.irma-international.org/chapter/indicators-land-degradation-vulnerability-due/69050](http://www.irma-international.org/chapter/indicators-land-degradation-vulnerability-due/69050)