

# Chapter 5.20

## User Based Call Admission Control Algorithms for Cellular Mobile Systems

**Hamid Beigy**

*Sharif University of Technology, Iran*

**M. R. Meybodi**

*Amirkabir University of Technology, Iran*

### ABSTRACT

*Call admission control in mobile cellular networks has become a high priority in network design research due to the rapid growth of popularity of wireless networks. Dozens of various call admission policies have been proposed for mobile cellular networks. This chapter proposes a classification of user based call admission policies in mobile cellular networks. The proposed classification not only provides a coherent framework for comparative studies of existing approaches, but also helps future researches and developments of new call admission policies.*


### 1. INTRODUCTION

The frequency spectrum allocated to the mobile communication networks is very limited. This means that the frequency channels have to be reused as much as possible in order to support the many thousands of simultaneous calls that may arise in any typical mobile communication network (Katzela & Naghshineh, 1996). Thus,

the efficient management and sharing of channels among numerous users become an important issue. In cellular networks the geographical area covered by the network is divided into smaller regions called cells. Each cell is serviced by a base station, located at its center. The base station is used to service the users located at that cell. A number of base stations are again linked to a central server called mobile switching center, which also acts as a gateway of the mobile communication network to the existing wire-line networks such as PSTN,

DOI: 10.4018/978-1-61350-101-6.ch520

Figure 1. System model of cellular networks

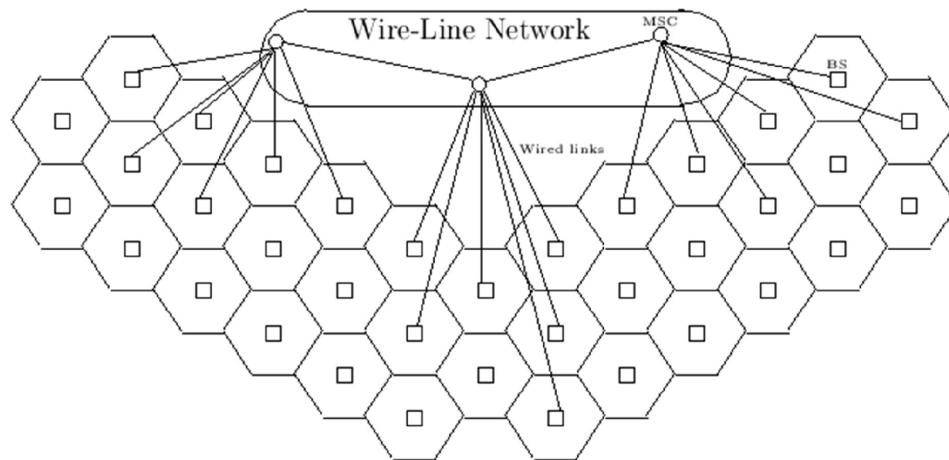

or internet. A base station communicates with users (mobile stations) through wireless links and with mobile switching centers through dedicated links. The model of such a network referred to as *cellular network* is shown in Figure 1 (Das & Sen & Jayaram, 1998).

We assume that the network uses a fixed channel assignment algorithm, which means that each base station has a fixed number of channels (capacity). This capacity is interpreted in terms of bandwidth and is independent of used multiple access technology such as FDMA, TDMA, or CDMA. In order for a mobile user to be able to communicate with other user(s), a connection usually must be established between the users. The establishment and maintenance of a connection in cellular networks is the responsibility of the base stations. In order to establish a connection, a mobile user must first specify its traffic characteristics and quality of service (QoS) requirements. This traffic specification may be either implicit or explicit depending on the type of services provided by the network. For example, in a cellular phone network, the traffic characteristics and QoS requirements of voice connections are known a priori to the base station, and therefore, they are usually specified implicitly in a connection request. The next generation wireless net-

works are expected to eventually carry multimedia traffic such as voice, mixed voice and data, image transmission, email and etc. The traffic characteristics and the QoS requirements of connections for these services may not be known a priori to the base station. In these networks, mobile users must specify explicitly the traffic characteristics and the QoS requirements as a part of the connection request. Then, the base station determines whether it can meet the requested QoS requirements and, if possible, establish a connection.

When a call is originated and attempted in a cell, one channel allocated to the base station is used for the communication between the mobile station and the base station as long as channel is available. When all channels in a cell are in use while a call is attempted, then it will be blocked and cleared from the system. When a call gets a channel, it will keep the channel until its completion, or until it moves out of the cell, in which case the used channel will be released. When the mobile station moves into a new cell while its call is ongoing, a new channel needs to be acquired in the new cell for further communication. This process is called *handoff* and must be transparent to the mobile user. During the handoff, if there is no channel is available in the new cell for the

31 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:

[www.igi-global.com/chapter/user-based-call-admission-control/58852](http://www.igi-global.com/chapter/user-based-call-admission-control/58852)

## Related Content

---

### A Taxonomy of Routing Techniques in Underwater Wireless Sensor Networks

Muhammad Ayaz, Azween Abdullah and Ibrahima Faye (2012). *Wireless Sensor Networks and Energy Efficiency: Protocols, Routing and Management* (pp. 119-147).

[www.irma-international.org/chapter/taxonomy-routing-techniques-underwater-wireless/62734](http://www.irma-international.org/chapter/taxonomy-routing-techniques-underwater-wireless/62734)

### QoS-Constrained Resource Allocation Scheduling for LTE Network

Hung-Chin Jang and Yun-Jun Lee (2015). *International Journal of Wireless Networks and Broadband Technologies* (pp. 1-15).

[www.irma-international.org/article/qos-constrained-resource-allocation-scheduling-for-lte-network/125815](http://www.irma-international.org/article/qos-constrained-resource-allocation-scheduling-for-lte-network/125815)

### Networks of Underwater Sensor Wireless Systems: Latest Problems and Threats

Meenu Rani and Poonam Singal (2021). *International Journal of Wireless Networks and Broadband Technologies* (pp. 59-69).

[www.irma-international.org/article/networks-of-underwater-sensor-wireless-systems/272052](http://www.irma-international.org/article/networks-of-underwater-sensor-wireless-systems/272052)

### A Survey on Routing Protocols of Wireless Sensor Networks: A Reliable Data Transfer Using Multiple Sink for Disaster Management

Chandana Rani Kandru and Ravi Sankar Sangam (2019). *Next-Generation Wireless Networks Meet Advanced Machine Learning Applications* (pp. 84-99).

[www.irma-international.org/chapter/a-survey-on-routing-protocols-of-wireless-sensor-networks/221427](http://www.irma-international.org/chapter/a-survey-on-routing-protocols-of-wireless-sensor-networks/221427)

### Resource Allocation using Dynamic Fractional Frequency Reuse: A Technique to Reduce Inter Cell Interference at the Cells Edges

Anitha S. Sastry and Akhila S (2017). *International Journal of Wireless Networks and Broadband Technologies* (pp. 34-44).

[www.irma-international.org/article/resource-allocation-using-dynamic-fractional-frequency-reuse/198515](http://www.irma-international.org/article/resource-allocation-using-dynamic-fractional-frequency-reuse/198515)