

Chapter 13

A Comparative Study of Evolutionary Algorithms for Maximizing Reliability of a Flow in Cellular IP Network

Mohammad Anbar
Tishreen University, Syria

Deo Prakash Vidyarthi
Jawaharlal Nehru University, India

ABSTRACT

The rapid development in technology, witnessed in daily communication, especially in wireless communication, is a good motivation for performance improvement in this field. Cellular IP access network is a suitable environment where a micro mobility of mobile users is implemented and managed. The reliability of Cellular IP network during the communication is an important characteristic measure and must be considered while designing a new model. Evolutionary Algorithms are powerful tools for optimization and problem solving, which require extracting the best solution from a big search space. This chapter explores the reliability issue in Cellular IP of a flow of packets passing through the route from a source to a destination. The main aim of the chapter is to maximize the reliability of the flow passing through a route having number of routers. Two Evolutionary Algorithms (EAs), Genetic Algorithm (GA) and Particle Swarm Optimization (PSO), have been used for this purpose, and a comparative study between the two is performed. Experimental studies of the proposed work have also been performed.

DOI: 10.4018/978-1-4666-0203-8.ch013


INTRODUCTION

Different operations such as handoff, paging and routing are performed by the Mobile Hosts (MHs) in Cellular IP network, which consists of many cells controlled by the base stations (BSs). Routing, in Cellular IP network, is done on hop-by-hop basis. The structure of Cellular IP network, depicted in Figure 1, explains the reason for hop-by-hop routing. Each base station in the network is configured with a downlink and an uplink and when a packet destined to a MH encounters a BS it simply forwards it to the next hop as per the routing information available in the routing cache (RC) with each BS (Campbell, & Gomez, 2000). Routing is an important operation as a good deal of processing time is involved here that desires the components to be available during this period to make the routing reliable.

Technically, base stations in Cellular IP networks serve as routers for a flow of packets intended to be sent to a MH under the control of BS till it reaches the final destination. During the routing operation, each BS checks its RC to find the route through which the flow is to be directed. Working as a router, BS's CPU is involved in packet processing operation. Some amount of time is involved to process a packet at CPU router. This time period is important for a flow as the routers should not fail during this period for reliable transmission. Router CPU is a scarce resource (Tanenbaum, 2004) and the reliability of the flow should be maximized in Cellular IP network.

It is important in Cellular IP networks how the data packets are transmitted and processed through a route. Doing so is an important job to be done in this type of wireless networks, which manage the micro mobility of the users and the time is an important parameter in it. Reliability is the probability that the network, consisting of various components, performs its intended function for a given time period when operated under normal (or stated) environmental conditions. The

Figure 1. Structure of cellular IP network

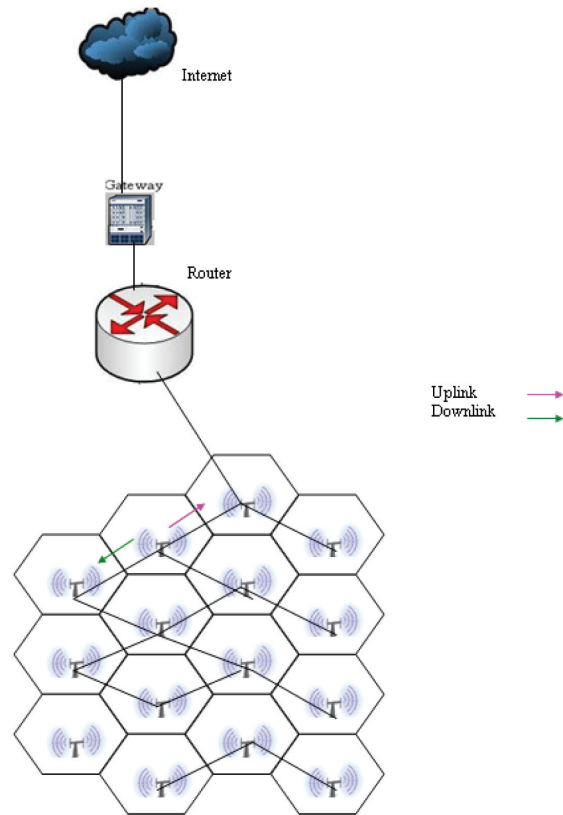

unreliability of a connection is the probability that the experienced outage probability for the connection is larger than a predefined maximum tolerable value. The connection reliability is related to the traffic parameters (Zhao, Shen, & Mark, 2006). Base stations in a wireless cellular IP network environment are prone to failure (Prakash, Shivaratri, & Singhal, 1999). Due to the failure of a base station, all the connections in the failed cell area get terminated and all the services are interrupted until the failed base station is restored. Base station failure significantly degrades the performance and bandwidth utilization of the Cellular IP networks. Specifically, services for high priority ongoing calls such as real-time traffic could be interrupted, which is usually not acceptable.

9 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:

www.igi-global.com/chapter/comparative-study-evolutionary-algorithms-maximizing/63690

Related Content

Context-Aware Service Discovery in Ubiquitous Computing

Huaqun Guo, Daqing Zhang, Lek-Heng Ngoh, Song Zheng and Wai-Choong Wong (2008). *Encyclopedia of Internet Technologies and Applications* (pp. 119-125).

www.irma-international.org/chapter/context-aware-service-discovery-ubiquitous/16843

Role of Communication Technologies for Smart Applications in IoT

Garima Singhand Gurjit Kaur (2019). *Handbook of Research on Big Data and the IoT* (pp. 300-313).

www.irma-international.org/chapter/role-of-communication-technologies-for-smart-applications-in-iot/224276

Smart Senior Residences: How to Improve Services Efficiency and Quality by Exploiting Big Data and Ambient Intelligence

Bruno Bouchard, Kevin Bouchard, Sebastien Gaboury and Abdenour Bouzouane (2018). *Big Data Management and the Internet of Things for Improved Health Systems* (pp. 65-85).

www.irma-international.org/chapter/smart-senior-residences/196040

Voice Over Internet Protocol: A New Paradigm in Voice Communication

Indranil Bose and Fong Man Chun (2008). *Encyclopedia of Internet Technologies and Applications* (pp. 663-669).

www.irma-international.org/chapter/voice-over-internet-protocol/16918

A Trusted Ubiquitous Healthcare Monitoring System for Hospital Environment

Durga Prasad, Niranjana N. Chiplunkar and K. Prabhakar Nayak (2020). *Securing the Internet of Things: Concepts, Methodologies, Tools, and Applications* (pp. 239-252).

www.irma-international.org/chapter/a-trusted-ubiquitous-healthcare-monitoring-system-for-hospital-environment/234947