

Chapter 3.19

MMIR:

An Advanced Content–Based Image Retrieval System Using a Hierarchical Learning Framework

Min Chen

Florida International University, USA

Shu-Ching Chen

Florida International University, USA

ABSTRACT

This chapter introduces an advanced content-based image retrieval (CBIR) system, MMIR, where Markov model mediator (MMM) and multiple instance learning (MIL) techniques are integrated seamlessly and act coherently as a hierarchical learning engine to boost both the retrieval accuracy and efficiency. It is well-understood that the major bottleneck of CBIR systems is the large semantic gap between the low-level image features and the high-level semantic concepts. In addition, the perception subjectivity problem also challenges a CBIR system. To address these issues and challenges, the proposed MMIR system utilizes the MMM mechanism to direct the focus on the image level analysis together with the MIL technique (with the neural network technique as

its core) to real-time capture and learn the object-level semantic concepts with some help of the user feedbacks. In addition, from a long-term learning perspective, the user feedback logs are explored by MMM to speed up the learning process and to increase the retrieval accuracy for a query. The comparative studies on a large set of real-world images demonstrate the promising performance of our proposed MMIR system.

INTRODUCTION

Content-based image retrieval (CBIR), which was proposed in the early 1990s, has attracted a broad range of research interests from many computer communities in the past decade. Generally speaking, in a CBIR system, each image is

first mapped to a point in a certain feature space, where the features can be categorized into color (Stehling, Nascimento, & Falcao, 2000), texture (Kaplan et al., 1998), shape (Zhang & Lu, 2002), and so forth. Next, given a query in terms of image examples, the system retrieves images with regard to their features (He, Li, Zhang, Tong, & Zhang, 2004). Though extensive research efforts have been directed into this area, it still remains a big challenge and an open issue in terms of retrieving the desired images from the large image repositories effectively and efficiently. In short, some of the major obstacles can be summarized as follows.

- First, it is widely accepted that the major bottleneck of CBIR systems is the large semantic gap between the low-level image features and high-level semantic concepts, which prevents the systems from being

applied to real applications (Hoi & Lyu, 2004).

- Second, the perception subjectivity problem poses additional challenges for CBIR systems. In other words, in viewing the same image (e.g., Figure 1a), different users might possess various interests in either a certain object (e.g., the house, the tree, etc.) or the entire image (e.g., a landscape during the autumn season). In this case, Figure 1b, Figure 1c, or Figure 1d, respectively, might be considered as the relevant image with regard to Figure 1a. In addition, even a same user can have different perceptions toward the same image at various situations and with different purposes.

To address the earlier-mentioned challenges and issues, a certain form of adaptive (i.e., data-driven) description is required to capture the

Figure 1. Example images




(a)



(b)



(c)

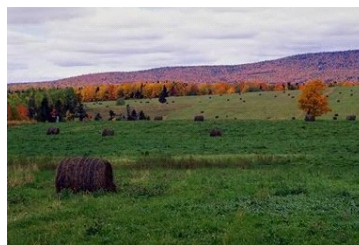

(d)

14 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:

www.igi-global.com/chapter/mmirt-advanced-content-based-image/7965

Related Content

Annotating Images by Mining Image Search

Xin-Jing Wang, Lei Zhang, Xirong Li and Wei-Ying Ma (2009). *Semantic Mining Technologies for Multimedia Databases* (pp. 323-349).

www.irma-international.org/chapter/annotating-images-mining-image-search/28840

Evaluation Criteria for Data Dictionaries

Chetan Sankar (1991). *Journal of Database Administration* (pp. 1-6).

www.irma-international.org/article/evaluation-criteria-data-dictionaries/51082

Applying Fuzzy Data Mining to Tourism Area

R. A. Carrasco, F. Araque, A. Salguero and M. A. Vila (2008). *Handbook of Research on Fuzzy Information Processing in Databases* (pp. 563-584).

www.irma-international.org/chapter/applying-fuzzy-data-mining-tourism/20368

Proper Placement of Derived Classes in the Class Hierarchy

Reda Alhajj and Faruk Polat (2005). *Encyclopedia of Database Technologies and Applications* (pp. 486-492).

www.irma-international.org/chapter/proper-placement-derived-classes-class/11193

Narrativization in Information Systems Development

Pasi Raatikainen, Samuli Pekkola and Maria Mäkelä (2024). *Journal of Database Management* (pp. 1-30).

www.irma-international.org/article/narrativization-in-information-systems-development/333471