

# Mobile Phone Sensing in Scientific Research

**Bo Liu**

*University of Missouri, USA*

**A. Bulent Koc**

*University of Missouri, USA*

## INTRODUCTION

About a decade ago, mobile phones were mainly used to make phone calls and send text messages. They usually had small screens and keyboards. With the advent of the first generation smartphones, all this has changed. Smartphones have operating systems installed and they are equipped with several sensors like a gyroscope, accelerometer, magnetic sensor, GPS, camera, microphone and wireless interfaces (Wi-Fi, Bluetooth, 2/3/4G). Mobile phones also come with more powerful CPU processors, larger memories, and high-resolution touch screens. Applications running on smartphones can utilize the sensors and provide enhanced user experience. Currently, the number of smartphone users has surpassed the number of personal computers. Mobile phones are common in several countries in the world. In 2003, 56% of American adults owned smartphones, which meant about 175.8 million smartphone users in the USA (Duggan & Smith, 2013). The number of smartphone users is expected to reach 1.75 billion in the world (eMarketer, 2014).

The rapid growing number of smartphones is due to the technological advances. First, the availability of cheaper and smaller embedded sensors installed in smartphones reduced the total cost, increased user experience, and provided more data available for application developers to create innovative programs. Second, smartphones are being manufactured with operating systems like Google's Android, Apple's iOS or Windows

Phone. All of these platforms provide application stores for developers to upload applications that can be downloaded by smartphone users all over the world. This makes it possible to collect and analyze data that was not available before. Third, the mobile cloud computing technology enables convenient network access to a shared pool of data computing and storage. Both the data storage and its processing are carried outside the mobile phones where an application is launched. According to PewInternet (Duggan & Smith, 2013), 63% of adult mobile phone users use their phones to access internet related services, and this number has doubled since the first tracking of internet usage on mobile phones in 2009. In addition, about 21% of all adult mobile phone owners nowadays do most of their online browsing using their mobile phones instead of personal computers. More complicated and advanced tasks can be done by smartphones through cloud-based computing. Applications based on cloud technology can scale far beyond the capabilities of any smartphones. More importantly, these mobile phones usually are programmable and programmers have access to the sensor data captured by the phones. The computing and communication resources come with the mobile phones provide abundant opportunities for application developers.

Smartphones are equipped with various sensors and they are carried with people every day. Nowadays, several sensors are integrated into the smartphones. Sensors available on mobile phones can be classified as inertial, positioning,


and ambient sensors (Hoseini-Tabatabaei, Gluhak, & Tafazolli, 2013). Each of these types of sensors can be used to sense different aspects of environmental parameters. Figure 1 shows some of the built-in sensors in iPhone 5S. Among all the sensors, the most common sensors in smartphones are accelerometer, gyroscope, GPS, cameras and magnetic sensor in addition to the sensors for the basic phone functions.

### Inertial Sensors

Inertial sensors, gyroscopes and accelerometers, were first developed for use in aerospace applications where high performance was needed and their higher prices were tolerated. The advancement of the microelectromechanical systems (MEMS) makes inertial sensors commonly used in several

industries including communications, medical, and automotive (Shaeffer, 2013). Inertial sensors are used to measure or detect acceleration, tilt, shock, vibration, rotation, and multiple degrees-of-freedom motion. An important aspect is that accelerometers measure gravity and gyroscopes measure angular rate without external references. Accelerometers have been implemented to measure human physical activities (Fahim, Fatima, Lee, & Park, 2013; Kühnhausen, Leonhardt, Dirk, & Schmiedek, 2013; Pernek, Hummel, & Kokol, 2013), posture recognition (Yurur, Liu, & Moreno, 2013), and rehabilitation (Pfaeffli, Madison, Jiang, Dalleck, & Löf, 2013). Gyroscopes also have been used in a number of research applications. developed a pedestrian navigation method aided with a visual gyroscope and a visual odometer. Wu, Dasgupta, Ramirez, Peterson

Figure 1. Built-in sensors in iPhone 5S

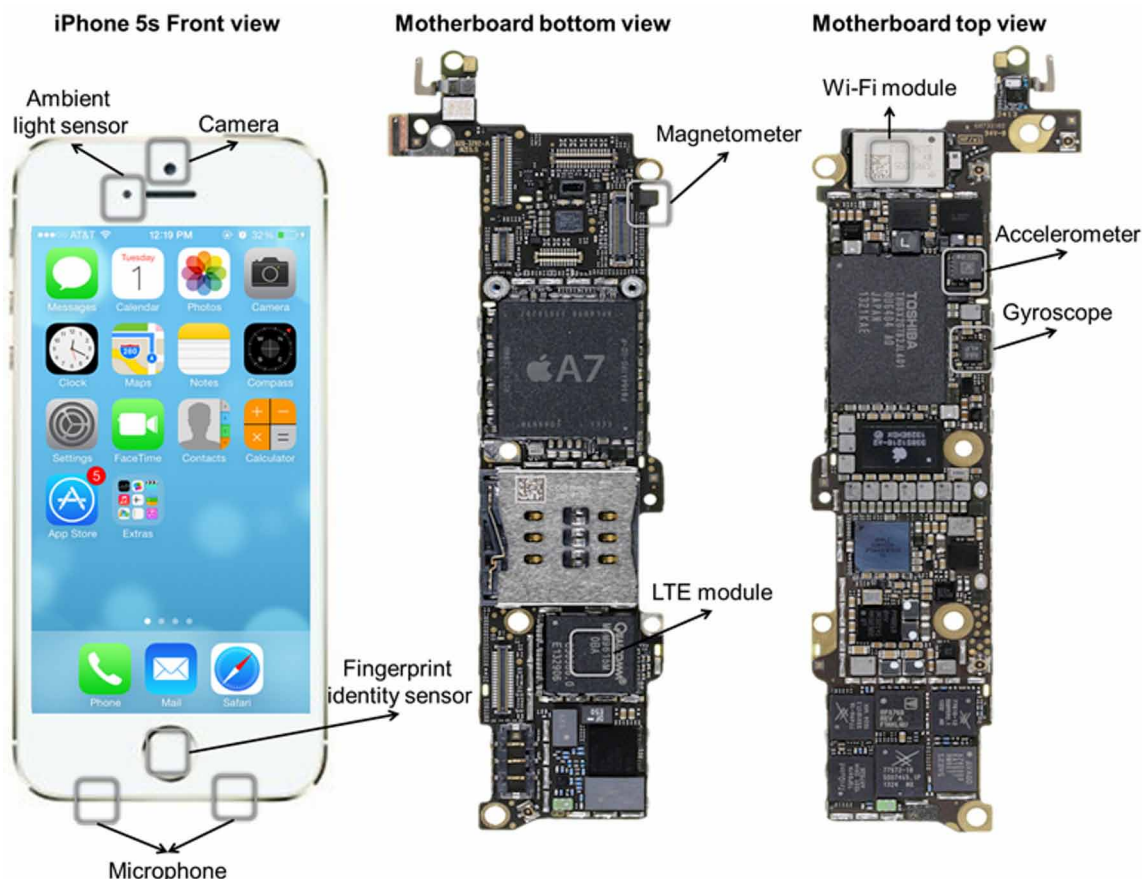

12 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:

[www.igi-global.com/chapter/mobile-phone-sensing-in-scientific-research/130160](http://www.igi-global.com/chapter/mobile-phone-sensing-in-scientific-research/130160)

## Related Content

---

### Impact of Personality Traits on Risk Tolerance and Investors' Decision Making

Misbah Sadiqand Hareem Amna (2019). *International Journal of Applied Behavioral Economics* (pp. 1-20).  
[www.irma-international.org/article/impact-of-personality-traits-on-risk-tolerance-and-investors-decision-making/223978](http://www.irma-international.org/article/impact-of-personality-traits-on-risk-tolerance-and-investors-decision-making/223978)

### Intelligent Software Agents in Electronic Commerce: A Socio-Technical Perspective

Mahesh S. Raisinghani, Christopher Klassenand Lawrence L. Schkade (2001). *Human Computer Interaction: Issues and Challenges* (pp. 104-112).  
[www.irma-international.org/chapter/intelligent-software-agents-electronic-commerce/22416](http://www.irma-international.org/chapter/intelligent-software-agents-electronic-commerce/22416)

### Approximation of Hate Detection Processes in Spanish and Other Non-Anglo-Saxon Languages

Juan José Cubillas Mercado, Óscar De Gregorio Vicenteand C. Vladimir Rodríguez Caballero (2023). *News Media and Hate Speech Promotion in Mediterranean Countries* (pp. 65-80).  
[www.irma-international.org/chapter/approximation-of-hate-detection-processes-in-spanish-and-other-non-anglo-saxon-languages/326105](http://www.irma-international.org/chapter/approximation-of-hate-detection-processes-in-spanish-and-other-non-anglo-saxon-languages/326105)

### Multilayered Approach to Evaluate Mobile User Interfaces

Maria de Fátima Queiroz Vieira Turnell, José Eustáquio Rangel de Queirozand Danilo de Sousa Ferreira (2009). *Human Computer Interaction: Concepts, Methodologies, Tools, and Applications* (pp. 2573-2589).  
[www.irma-international.org/chapter/multilayered-approach-evaluate-mobile-user/22404](http://www.irma-international.org/chapter/multilayered-approach-evaluate-mobile-user/22404)

### Reply Speed as Nonverbal Cue in Text Messaging with a Read Receipt Display Function: Effects of Messaging Dependency on Times until Negative Emotions Occur While Waiting for a Reply

Shogo Kato, Yuuki Katoand Yasuyuki Ozawa (2020). *International Journal of Technology and Human Interaction* (pp. 36-53).  
[www.irma-international.org/article/reply-speed-as-nonverbal-cue-in-text-messaging-with-a-read-receipt-display-function/239530](http://www.irma-international.org/article/reply-speed-as-nonverbal-cue-in-text-messaging-with-a-read-receipt-display-function/239530)