

Chapter 9

Machine Learning Approaches for Supernovae Classification

Surbhi Agrawal
PESIT-BSC, India

Kakoli Bora
PESIT-BSC, India

Swati Routh
Jain University, India

ABSTRACT

In this chapter, authors have discussed few machine learning techniques and their application to perform the supernovae classification. Supernovae has various types, mainly categorized into two important types. Here, focus is given on the classification of Type-Ia supernova. Astronomers use Type-Ia supernovae as “standard candles” to measure distances in the Universe. Classification of supernovae is mainly a matter of concern for the astronomers in the absence of spectra. Through the application of different machine learning techniques on the data set authors have tried to check how well classification of supernovae can be performed using these techniques. Data set used is available at Riess et al. (2007) (astro-ph/0611572).

INTRODUCTION


Cosmology is a data starved science. With the advancement of technology and new advanced technological telescopes and other such instruments, here we have a flood of data. Data which is not easy as well to be interpreted, very complex data. So, astronomical area requires various techniques which help in dealing with the problem of interpretation and analysis of such vast complex data. Out of several astronomical problems, here we have taken one such problem i.e. the problem of supernovae (SNe) classification using certain machine learning algorithms. But the question is why we need to classify supernovae or why is it important?

A supernova is a violent explosion of a star, whose brightness for an amazingly short period of time, matches that of the galaxy in which it occurs. This explosion can be due to the nuclear fusion in a de-

DOI: 10.4018/978-1-5225-2498-4.ch009

Figure 1. Supernova light curves

courtesy: www.astro.princeton.edu/~burrows/classes/403/supernovae.pdf

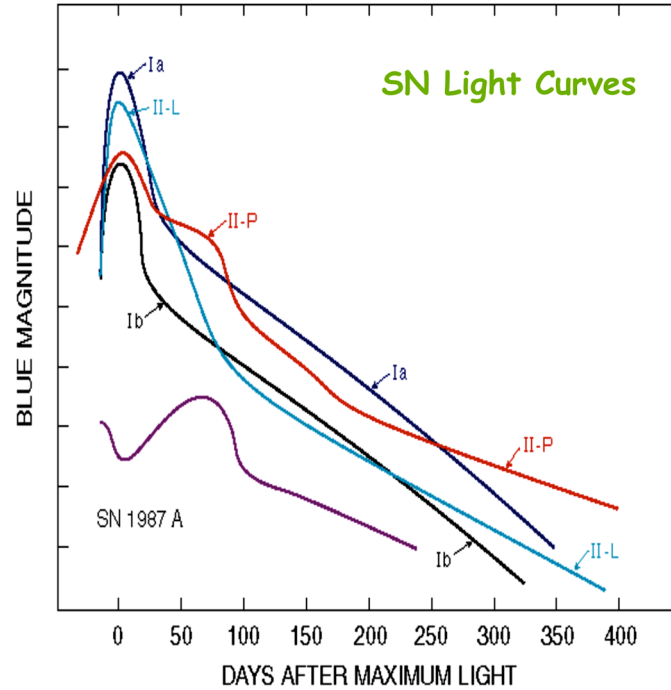

generated star or by the collapse of the core of a massive star, both leads in the generation of massive amount of energy. The shock waves due to explosion can lead to the formation of new stars and also helps astronomers indicate the astronomical distances. Supernovae are classified according to the presence or absence of certain features in their orbital spectra. According to Rudolph Minkowski there are two main classes of supernova, the Type-I and the Type-II. Type-I is further subdivided into three classes i.e. the Type-Ia, the Type-Ib and the Type-Ic. Similarly, Type II supernova are further sub-classified as Type II-P, Type II-L and Type II-n. The detail classification of these two types of supernova is discussed in the following section. Astronomers face lot of problem in classifying them because a supernova changes itself over the time. At one instance a supernovae belonging to a particular type, may get transformed into the supernovae of other type. Hence, at different time of observation, it may belong to different type. Also, when this spectra is not available, it poses a great challenge to classify them. They have to rely only on photometric measurements for their classification. This poses a big challenge in front of astronomers to do their studies. Figure 1 shows the supernova classification from their light curves.

Machine learning methods help researchers to analyze the data in real time. Here, we build a model from the input data. A learning algorithm is used to discover and learn knowledge from the data. These methods can be supervised (that rely on training set of objects for which target property is known) or unsupervised (require some kind of initial input data but unknown class).

In this chapter, classification of Type Ia supernova are taking in considerations from a supernova dataset defined in Davis et.al (2007), Reiss et al. (2007) and Wood Vessey et al. (2007) using several machine learning algorithms. To solve this problem, the dataset is classified in two classes which may aid astronomers in the classification of new supernovae with high accuracy. The chapter is further organized as - background, Machine learning techniques, results and conclusion.

11 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:

www.igi-global.com/chapter/machine-learning-approaches-for-supernovae-classification/181104

Related Content

Engineering Innovative Practice in Managing Design Projects

Fernando Abreu Gonçalves and José Figueiredo (2012). *International Journal of Actor-Network Theory and Technological Innovation* (pp. 13-23).

www.irma-international.org/article/engineering-innovative-practice-managing-design/69794

Between Blackboxing and Unfolding: Professional Learning Networks of Pastors

Ingrid Christine Reite (2013). *International Journal of Actor-Network Theory and Technological Innovation* (pp. 47-64).

www.irma-international.org/article/between-blackboxing-and-unfolding/105148

Exploring the Implications of Complexity Thinking for the Management of Complex Organizations

Kurt A. Richardson (2010). *Cybernetics and Systems Theory in Management: Tools, Views, and Advancements* (pp. 36-51).

www.irma-international.org/chapter/exploring-implications-complexity-thinking-management/39321

Have You Taken Your Guys on the Journey?: An ANT Account of IS Project Evaluation

Dubravka Cecez-Kecmanovic and Fouad Nagm (2011). *Actor-Network Theory and Technology Innovation: Advancements and New Concepts* (pp. 1-19).

www.irma-international.org/chapter/have-you-taken-your-guys/50114

The Fractal Spiral Model in Integrative Trauma Processing

Pierre-Henri Garnier and Jean-Pierre Courtial (2015). *International Journal of Actor-Network Theory and Technological Innovation* (pp. 14-27).

www.irma-international.org/article/the-fractal-spiral-model-in-integrative-trauma-processing/141548