

Chapter 6

Connectivity Estimation Approaches for Internet of Things–Enabled Wireless Sensor Networks

Zuleyha Akusta Dagdeviren

International Computer Institute, Ege University, Turkey

Vahid Akram

International Computer Institute, Ege University, Turkey

ABSTRACT

Internet of things (IoT) envisions a network of billions of devices having various hardware and software capabilities communicating through internet infrastructure to achieve common goals. Wireless sensor networks (WSNs) having hundreds or even thousands of sensor nodes are positioned at the communication layer of IoT. In this study, the authors work on the connectivity estimation approaches for IoT-enabled WSNs. They describe the main ideas and explain the operations of connectivity estimation algorithms in this chapter. They categorize the studied algorithms into two divisions as 1-connectivity estimation algorithms (special case for $k=1$) and k -connectivity estimation algorithms (the generalized version of the connectivity estimation problem). Within the scope of 1-connectivity estimation algorithms, they dissect the exact algorithms for bridge and cut vertex detection. They investigate various algorithmic ideas for k connectivity estimation approaches by illustrating their operations on sample networks. They also discuss possible future studies related to the connectivity estimation problem in IoT.

1. INTRODUCTION


Internet of Things (IoT) will include billions of computational devices communicating through Internet infrastructure (Xu, 2014) (Giri, 2017) (Lee, 2017) (Rehman, 2017) (Balaji, 2019) (Yugha, 2020). A robust network for IoT must deal with the malfunctions without losing its connectivity. Robust networks are one

DOI: 10.4018/978-1-7998-4186-9.ch006

of the important requirements in Internet of Things (IoT) because they provide a reliable infrastructure for communication of other devices. The nodes (vertices) in IoT systems are usually connected to each other over wireless channels and communicate by message passing. Hence failures in relay nodes can destroy the data transmission paths among nodes and waste many active resources. So, the underlying communication infrastructure of a reliable IoT should be able to tolerate the failures and keep the connectivity of active nodes.

Wireless sensor networks (WSNs) compose of nodes which have the abilities of sensing from the environment and transmission of the collected data in a wireless manner (Akyildiz, 2002) (Arampatzis, 2005) (Paradis, 2007) (Alemdar, 2010) (Rawat, 2014) (Jino Ramson, 2017). WSNs are crucial technologies for IoT and positioned at the communication layer. WSNs can be used in various practical scenarios such as smart cities, healthcare, military surveillance, target tracking and habitat monitoring. Generally, WSNs include at least one special node called the sink in which the data is collected. An example WSN modeled with a graph is given in Figure 1. In this network model, there are 14 sensor nodes, and the ID of each node is written inside it. The vertex set $V=\{0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13\}$. Transmission ranges are depicted as dashed circles. Possible communication channels (edges) between nodes are drawn with solid lines. The edge set $E=\{(0,4), (0,12), (1,10), (2,5), (2,9), (2,13), (3,7), (3,8), (5,11), (5,12), (5,13), (6,8), (6,11), (6,12), (7,10), (8,13), (9,10), (11,12), (11,13)\}$.

Figure 1. Network Model

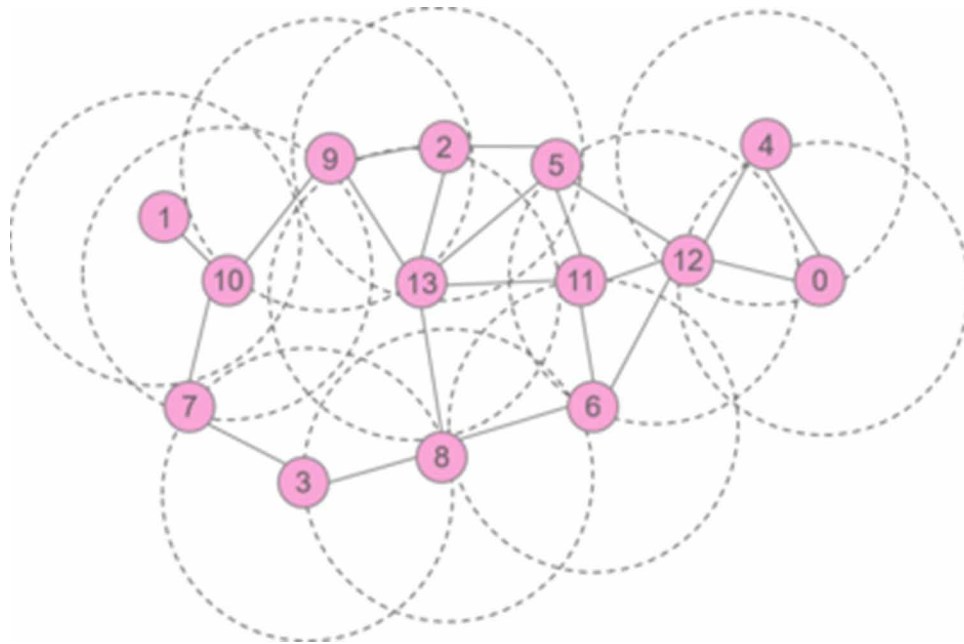

A WSN is connected if at least one communication path between every pair of nodes is present. Since WSNs are designed to operate in a distributed manner, maintaining network connectivity is of utmost importance to achieve common application goals by transmitting messages between nodes. If a vertex's removal partitions the communication network into disjoint segments, we call this vertex as cut vertex

17 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:
www.igi-global.com/chapter/connectivity-estimation-approaches-for-internet-of-things-enabled-wireless-sensor-networks/290077

Related Content

General Model for Metrics Calculation and Behavior Prediction in the Manufacturing Industry: An Automated Machine Learning Approach

Maria João Lopes, Eugénio M. Rocha, Petia Georgieva Georgieva and Nelson Ferreira (2021). *Handbook of Research on Applied Data Science and Artificial Intelligence in Business and Industry* (pp. 263-290).
www.irma-international.org/chapter/general-model-for-metrics-calculation-and-behavior-prediction-in-the-manufacturing-industry/284984

Transforming Healthcare Informatics Through Big Data Analytics: Opportunities and Challenges

Paramjeet Kaur and Manish Sharma (2023). *Contemporary Applications of Data Fusion for Advanced Healthcare Informatics* (pp. 392-411).
www.irma-international.org/chapter/transforming-healthcare-informatics-through-big-data-analytics/327730

Big Data and Knowledge Resource Centre

Sukhada Dinesh Pandkar and Soochitra Dhananjay Paatil (2021). *Big Data Applications for Improving Library Services* (pp. 90-106).
www.irma-international.org/chapter/big-data-and-knowledge-resource-centre/264126

Blockchain Technology: A Review of the Contemporary Disruptive Business Applications

Tarek Taha Kandil, Shereen Nassar and Mohamed Taysir (2021). *Research Anthology on Blockchain Technology in Business, Healthcare, Education, and Government* (pp. 1061-1084).
www.irma-international.org/chapter/blockchain-technology/268648

Responsible Machine Learning for Ethical Artificial Intelligence in Business and Industry

Deepak Saxena, Markus Lamestand and Veena Bansal (2021). *Handbook of Research on Applied Data Science and Artificial Intelligence in Business and Industry* (pp. 639-653).
www.irma-international.org/chapter/responsible-machine-learning-for-ethical-artificial-intelligence-in-business-and-industry/285003