

A Bio-Inspired Approach to Solve the Problem of Regular Carpooling

Khadidja Yachba

 <https://orcid.org/0000-0002-7754-2823>

LIO Laboratory, University of Relizane, Algeria

Zakaria Bendaoud

 <https://orcid.org/0000-0003-3091-5044>

GeCoDe Laboratory, University of Saida Dr. Moulay Tahar, Algeria

Karim Bouamrane

LIO Laboratory, Oran 1 University, Algeria

Rachid Kaleche

LIO Laboratory, Oran 1 University, Algeria

INTRODUCTION

The idea of carpooling is to share a car with several people making the same trip. Unlike hitchhiking, transportation costs are shared by everyone in the vehicle (Teal, 1987). It can be casual (travel, music festivals, etc.), or regular, such as carpooling with colleagues. Due to its economic and ecological benefits, carpooling is becoming more and more popular (Vanoutrive et al, 2012).

In most cases, carpooling reduces the cost of car trips. In fact, all the passengers of the vehicle share the expenses related to the displacement, such as the fuel cost and toll fees. The cost of this solution is significantly lower than that of taking public transportation or traveling alone by car.

Keeping in mind the time constraints of the operation, this work aims to minimize the number of vehicles used and the total distance travelled by all users.

Carpooling can be seen as a combination of a clustering and routing problem.

Using the Firefly algorithm, this work seeks to solve the problem of regular large carpools and extensions in a more effective way.

Numerous government agencies and employers have used carpooling as an effective strategy to address a wide range of climate, environmental, and congestion mitigation goals, while simultaneously increasing roadway and parking capacity for decades. (Shaheen et al, 2018).

The authors of this study are interested in regular carpooling. Finding the best groups under different constraints is the challenge.


The main objective of this study is to provide companies with efficient use of transport increase their returns. As a result, several questions are required:

- How the best group be properly determined?
- How the distances be minimized?
- How should we proceed to reduce transport costs?

DOI: 10.4018/978-1-7998-9220-5.ch175

The rest of the chapters are organized as follows: section 2 provides an overview of the subject area. Sections 3, 4, and 5 describe the method used to develop the contribution. In section 6, the authors present the results obtained using the proposed approach. These results are discussed in section 7. The authors finish with a conclusion, including future possibilities.

Figure 1. Regular carpooling

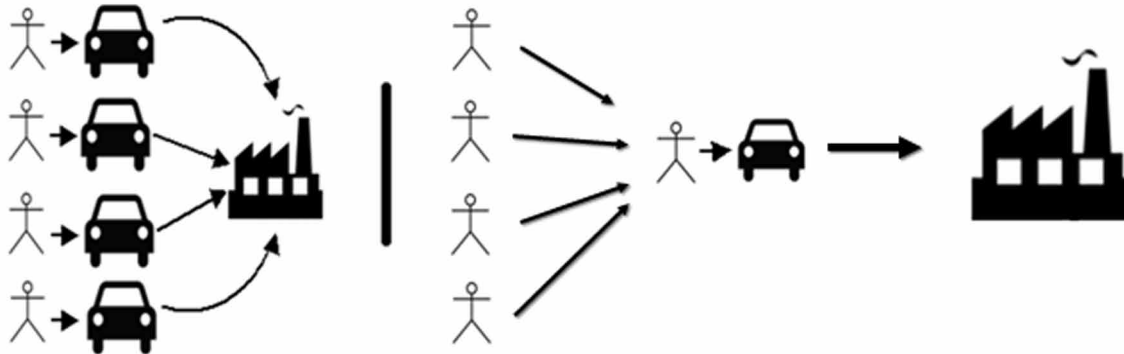

BACKGROUND

This section presents an overview of the methods used to solve carpooling problems.

In 2021, Kaleche (Kaleche et al, 2021) presented An Improved Biogeography Based Optimization for the Long Term Carpooling Problem.

Unlike the popularity of its related problems, little literature exists on carpooling. In the literature, different approaches have been proposed to solve the problem of regular carpooling, including an algorithm based on recording functions (Ferrari, 2003), The ANTS algorithm (Akka, 2018), a simulation-based approach (Viegas, 2010), a multi-matching system (Yan, 2011), and the Bird swarm algorithm for solving the long-term carpooling problem (Bendaoud, 2018). In this section, the authors classify resolution methods into two main categories: heuristics and metaheuristics.

Saving Functions Based Algorithm (SFBA)

In the SFBA Algorithm, a heuristic information processing routine is used to support efficient matching in carpool systems.

In addition, they are based on saving functions and belong to two distinct classes of algorithms to provide two deferential models of this problem. The focus is primarily on modeling the problem, rather than resolving it.

By associating different users to the support of the body model, resolution methods are relatively simple. In real-world applications, the approach has shown to be able to reduce travel distance by a significant amount.

Despite this, the approach relies heavily on the distribution of users; only benchmarks with clustered distributed users have achieved satisfactory results (Ferrari, 2003).

16 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:
www.igi-global.com/chapter/a-bio-inspired-approach-to-solve-the-problem-of-regular-carpooling/317726

Related Content

AI Is Transforming Insurance With Five Emerging Business Models

Alex Zarifisand Xusen Cheng (2023). *Encyclopedia of Data Science and Machine Learning* (pp. 2086-2100).

www.irma-international.org/chapter/ai-is-transforming-insurance-with-five-emerging-business-models/317609

Power Consumption Prediction of IoT Application Protocols Based on Linear Regression

Sidna Jeddou, Amine Baina, Najid Abdallahand Hassan El Alami (2021). *International Journal of Artificial Intelligence and Machine Learning* (pp. 1-16).

www.irma-international.org/article/power-consumption-prediction-of-iot-application-protocols-based-on-linear-regression/287585

Biodiversity Conservation, Internet of Things in Environmental Science, Deep Learning

Manoj Kumar Sharma, M. Poonguzhali, Prashanthi Sandepogu, S. Logeswaran, Abhijeet Dasand Sureshkumar Myilsamy (2024). *Reshaping Environmental Science Through Machine Learning and IoT* (pp. 137-159).

www.irma-international.org/chapter/biodiversity-conservation-internet-of-things-in-environmental-science-deep-learning/346575

Power Consumption Prediction of IoT Application Protocols Based on Linear Regression

Sidna Jeddou, Amine Baina, Najid Abdallahand Hassan El Alami (2021). *International Journal of Artificial Intelligence and Machine Learning* (pp. 1-16).

www.irma-international.org/article/power-consumption-prediction-of-iot-application-protocols-based-on-linear-regression/287585

Deep Convolutional Neural Network for Object Classification: Under Constrained and Unconstrained Environments

Amira Ahmad Al-Sharkawy, Gehan A. Bahgat, Elsayed E. Hemayedand Samia Abdel-Razik Mashali (2021). *Handbook of Research on Deep Learning-Based Image Analysis Under Constrained and Unconstrained Environments* (pp. 317-343).

www.irma-international.org/chapter/deep-convolutional-neural-network-for-object-classification/268326