## Chapter 19

# Effective Integration of Reliable Routing Mechanism and Energy Efficient Node Placement Technique for Low Power IoT Networks

### P. Sarwesh

National Institute of Technology Karnataka, India

#### N. Shekar V. Shet

National Institute of Technology Karnataka, India

#### K. Chandrasekaran

National Institute of Technology Karnataka, India

## **ABSTRACT**

Internet of Things (IoT) is the emerging technology that links physical devices (sensor devices) with cyber systems and allows global sharing of information. In IoT applications, devices are operated by battery power and low power radio links, which are constrained by energy. In this paper, node placement technique and routing mechanism are effectively integrated in single network architecture to prolong the lifetime of IoT network. In proposed network architecture, sensor node and relay node are deployed, sensor nodes are responsible for collecting the environmental data and relay nodes are responsible for data aggregation and path computation. In node placement technique, densities of relay nodes are varied based on traffic area, to prevent energy hole problem. In routing technique, energy efficient and reliable path computation is done to reduce number of re transmissions. To adopt IoT scenario, we included IEEE 802.15.4 PHY/MAC radio and IPv6 packet structure in proposed network architecture. Proposed work result shows, proposed architecture prolongs network lifetime.

DOI: 10.4018/978-1-5225-9866-4.ch019

### 1. INTRODUCTION

In IoT applications, the word "smart" is included everywhere such as, smart city, smart home, smart market, smart health, etc. Because the word "smart" refers the availability smart devices used in IoT applications, which works autonomously with its basic capabilities. IoT devices works smart but they are limited by energy (due to battery sourced devices). Thus, improving reliability with better network life time is the major challenge in IoT networks. In environmental monitoring applications, sensor devices are deployed in remote area (harsh environment). In commercial applications sensor devices are kept for constant observation. When nodes drainout its power in short span of time, it is difficult to replace the battery frequently, which severely affects the consumer as well as service provider (ITU, 2005; Lee et al., 2012; Boukerche, 2008). Hence energy is considered as the important resource in low power (energy constrained) wireless networks.

## 1.1. IoT Challenges

IoT technology is used by various applications such as, health care industries, home automation, location accuracy, weather monitoring, etc. Figure 1 elaborates the features of IoT WFRM (IOTWF), which is the generic architectural model that describes the features of IoT. In Figure 1, first three layers are handled by edge devices (sensor devices) that collects and processes the event based data (real time data), last three layers are handled by higher end devices (server, PCs, etc.) that collects and processes query based data (non real time data), middle layer is responsible for data storage (IOTWF).

In Figure 1 IoT challenges are included. This says energy efficiency and reliability are the major requirement for lower layers that handles low power devices. Hence energy efficiency and reliability are considered as our major objectives in proposed network design.

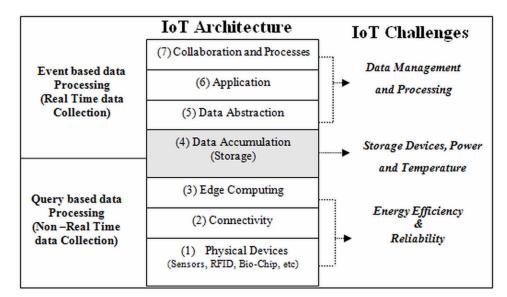


Figure 1. IoT World Form Reference Model

18 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:

www.igi-global.com/chapter/effective-integration-of-reliable-routingmechanism-and-energy-efficient-node-placement-technique-for-low-poweriot-networks/234952

## **Related Content**

## Cultural Heritage and Digitalization in City Branding

Oya Yildirimand A. Celil Çakici (2022). Handbook of Research on Digital Communications, Internet of Things, and the Future of Cultural Tourism (pp. 467-483).

www.irma-international.org/chapter/cultural-heritage-and-digitalization-in-city-branding/295518

## Quality of Service Architectures

Christos Bouras, Apostolos Gkamas, Dimitris Primpasand Kostas Stamos (2008). *Encyclopedia of Internet Technologies and Applications (pp. 425-431).* 

www.irma-international.org/chapter/quality-service-architectures/16885

## Smart City Ecosystem: An Exploration of Requirements, Architecture, Applications, Security, and Emerging Motivations

Wasswa Shafikand Kassim Kalinaki (2023). Handbook of Research on Network-Enabled IoT Applications for Smart City Services (pp. 75-98).

www.irma-international.org/chapter/smart-city-ecosystem/331327

#### Hybrid Integration Technology for Wearable Sensor Systems

Li Xie, Lirong Zhengand Geng Yang (2017). *Internet of Things and Advanced Application in Healthcare (pp. 98-137).* 

www.irma-international.org/chapter/hybrid-integration-technology-for-wearable-sensor-systems/170238

## Acceptance, Use, and Influence of Political Technologies among Youth Voters in the 2008 US Presidential Election

Lara Khansa, Tabitha Jamesand Deborah F. Cook (2012). *E-Politics and Organizational Implications of the Internet: Power, Influence, and Social Change (pp. 133-155).* 

www.irma-international.org/chapter/acceptance-use-influence-political-technologies/65213