

Chapter 6

Experimental Error Measurement in Monte Carlo Simulation

Lucia Cassettari

University of Genoa, Italy

Roberto Mosca

University of Genoa, Italy

Roberto Revetria

University of Genoa, Italy

ABSTRACT

This chapter describes the set up step series, developed by the Genoa Research Group on Production System Simulation at the beginning of the '80s, as a sequence, through which it is possible at first statistically validate the simulator; then estimate the variables which effectively affect the different target functions, then obtain, through the regression meta-models, the relations linking the independent variables to the dependent ones (target functions) and, finally, proceed to the detection of the optimal functioning conditions. The authors pay great attention to the treatment, the evaluation and control of the Experimental Error, under the form of Mean Square Pure Error (MS_{PE}), a measurement which is always culpably neglected in the traditional experimentation on the simulation models but, that potentially can consistently invalidate with its magnitude the value of the results obtained from the model.

INTRODUCTION

The canonical modelling type of many disciplines and, particularly, for that concerned by this chapter, of many engineering studies is that allowing to supply representations of the phenomenal reality through mathematical propositions whose

elaboration gives quantitative data making possible evaluation of the target system deriving from the formulated target function (see Figure 1).

Therefore, when the reality is excessively complex, the attempt to close it inside a rigid formalism of an equation series is practically impossible, then, the going on this way can mean the changing of its real characteristics due to the introduction of

DOI: 10.4018/978-1-60566-774-4.ch006

conceptual simplifications necessary, in any case, to achieve the model making up.

The fact that, with this formulation one of the modelling fundamental principles stating that “it is the model which should adapt to the target reality and not the reality which must be simplified to be put down in a model” is failed, has a great importance since, under these conditions, the value of the achievable results, afterward, will result from not much significant to distorted with a serious prejudice for their usability for system correct analysis purposes, as, unfortunately, often takes place for numerous models of complex systems acting in the discrete in presence of stochastic character.

In these cases, the simulating tool able to avoid the purely analytic model typical rigidities exploiting the logic proposition flexibility, with which compensate the descriptive impossibilities of the mathematic type ones, is the only tool able to allow the investigated system effective and efficient representation.

The remarkable power, in terms of adherence to the target reality, of discrete and stochastic simulation models is, therefore, frequently dissipated in the traditional experimentation phase that, as it is carried out, is, indeed, strongly self-limiting and never able to make completely emerging that developed inside the model. The what if analysis, indeed, making varying in in-

put, at each experimental act, one or at most few input variables, produces, in output, partial and inhomogeneous among them scenarios, since related to punctual single situations and not resulting from an univocal matrix of experimental responses (see Figure 2). Therefore such a gap can be conveniently overcome using some planned test techniques (see Figure 3) borrowed from the Design of Experiments and the Response Surface Methodology, through which translate the experimental responses, resulting from suitable solicitations imposed to the model through values assigned to the independent variables according to pre-organized schemes, in real state equations valid inside a pre-established domain of the target system operating field.


In the following pages the set up step series (see Figure 4), developed by the Genoa Research Group on the production system simulation at the beginning of the '80s are shown as a sequence, through which it is possible at first statistically validate the simulator, then estimate the variables which effectively affect the different target functions, then obtain, through the regression meta-models, the relations linking the independent variables to the dependent ones (target functions) and, finally, proceed to the detection of the optimal functioning conditions (Mosca and Giribone, 1982).

DETERMINATION OF THE SIMULATION RUN

Introduction

After the model construction and analogical validation (that is after having shown the model ability to faithfully describe the investigated reality) it is necessary to achieve the statistic validation. With this acceptance it is intended to make clear the confirmation of a suitable model ability to treat the stochastic character transferred in it by the target system. To understand the determinant importance of this aspect it is sufficient to observe how, in a

Figure 1.

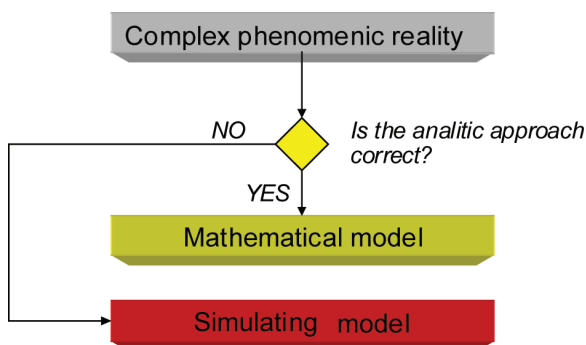

49 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:

www.igi-global.com/chapter/experimental-error-measurement-monte-carlo/38259

Related Content

Time Restraint Load Balancing in the Cloud Environment

Nikita Malhotra, Sanjay Tyagi and Monika Singh (2022). *International Journal of Grid and High Performance Computing* (pp. 1-11).

www.irma-international.org/article/time-restraint-load-balancing-in-the-cloud-environment/301592

Efficient Discrete Simulation of Coded Wireless Communication Systems

Pedro J.A. Sebastião, Francisco A.B. Cercas and Adolfo V.T. Cartaxo (2010). *Handbook of Research on Discrete Event Simulation Environments: Technologies and Applications* (pp. 143-177).

www.irma-international.org/chapter/efficient-discrete-simulation-coded-wireless/38260

Deep Neural Network for Electromyography Signal Classification via Wearable Sensors

Ying Chang, Lan Wang, Lingjie Lin and Ming Liu (2022). *International Journal of Distributed Systems and Technologies* (pp. 1-11).

www.irma-international.org/article/deep-neural-network-for-electromyography-signal-classification-via-wearable-sensors/307988

EcoGrid: A Toolkit for Modelling and Simulation of Grid Computing Environment for Evaluation of Resource Management Algorithms

Hemant Kumar Mehta (2014). *International Journal of Grid and High Performance Computing* (pp. 1-16).

www.irma-international.org/article/ecogrid/119449

Evaluating Heuristics for Scheduling Dependent Jobs in Grid Computing Environments

Geoffrey Falzon and Maozhen Li (2012). *Grid and Cloud Computing: Concepts, Methodologies, Tools and Applications* (pp. 1099-1113).

www.irma-international.org/chapter/evaluating-heuristics-scheduling-dependent-jobs/64531